

SILICONE FACADE PAINT

KLEIB PROFESSIONAL Q3 is part of a product set used for the KLEIB building insulation system in compliance with Technical Approval no. AT-15-8239/2012 and the KLEIB W system in compliance with Technical Approval no. AT-15-8895/2012. The approvals have been issued by the Building Research Institute in Warsaw.

USE

KLEIB PROFESSIONAL Q3 is a silicone facade paint used primarily for painting thin-layer mineral or silicone plasters in the KLEIB and KLEIB W building insulation systems.

SUBSTRATE PREPARATION

The substrate should be dry, stable and solid (i.e. appropriately strong and purified of any layers that could weaken the paint's adhesion). New mineral plasters may be painted after they have been primed with KLEIB PROFESSIONAL G2, no sooner than 14 days after their application.

PAINT PREPARATION

KLEIB Q3 paint is provided ready-for-use. After opening the bucket, the contents should be mixed in order to smoothen the product's consistency.

APPLICATION

Apply thin, even coats of paint on the entire surface by using a brush, a roller or an airless spray gun. Dilute the first layer, adding up to 10% of water.

PRODUCT CONSUMPTION

Average when applying a single coat on an even surface: approx. 0.12 l/m².

STORAGE AND TRANSPORTATION

KKLEIB PROFESSIONAL Q3 must be stored in airtight buckets in dry conditions and above zero temperatures for a maximum of 12 months after the production date found on the label.

TECHNICAL SPECIFICATION

Bulk density		1.56 g/cm ³ ± 10%
Percentage of dry substance		65.8 -3.3/+6.6
Percentage of ash	in 450°C	79.3 - 87.7
	in 900°C	54.3 - 60.1
Surface and ambient temperature during application		Between +5°C and +25°C

This product is compliant with Technical Approval no. AT-15-8239/2012.

This product is compliant with Technical Approval no. AT-15-8895/2012.

National Declaration of Conformity no. ... for the KLEIB insulation system.

National Declaration of Conformity no. ... for the KLEIB W insulation system.


This product comes with a Hygienic Approval.

Certifying authority that participated in the evaluation of conformity:

**Building Research Institute
Filtrowa 1
00-611 Warsaw**

MANUFACTURER

**KLEIB Sp. z o.o.
Kolejowa 15 - 17
87-880 Brześć Kujawski
Phone/Fax: 54 233-82-83
www.kleib.pl**

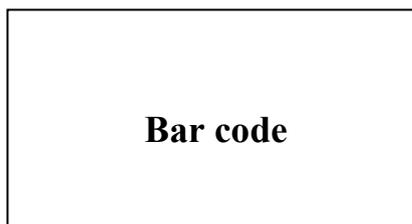

PRODUCED IN THE FOLLOWING PLANT:

**KLEIB Sp. z o.o.
Kolejowa 15 - 17
87-880 Brześć Kujawski**

Production date: